

DriTie

(Aus. Pat. App. No. 2007264783).

Remedial Stainless Steel Helical Wall Ties for Consistent Quality Masonry.



2nd Generation Engineered "Precise Pitch" Product Upgrade.

- Patented "Precise Pitch" Helical Consistency.
- Precise Helical Interlock Anchorage.
- Rapid cost effective hammer driven installation.
- Self-tapping spiral penetration.
- Enhanced Buckling Resistance.
- Accurate tracking across wide cavities.
- Combines Axial Strength with flexibility.
- Reliable in all types of masonry.
- Robust & Corrosion Free.
- 316 Grade Stainless Steel.
- High Tensile Strength.
- Stable, reliable & unobtrusive.
- Temperature and climate tolerant.
- Safe, Controlled and close-quarter installation

Intelligent design has delivered a low cost, reliable, setting tool and unique driving end arrangement, (Aus. Pat. App. No. 2007264783), to permit safer, controlled and close-quarter installation of the DriTie allowing the operator to maintain both hands on his drill. This eases installation, improves control and eliminates the need for cumbersome and expensive telescopic tooling arrangements.

Thor Helical DriTies have large work hardened fins that extend radially along and around an unhardened core to form a screw-like fastening member with longitudinal helical threads. Ties are formed from roll-profiled wire that is manufactured with patented "precise pitch" technology to tolerance levels that have not previously been achievable. The manufacturing processes, which are applied evenly along the length of the stainless steel, serve to greatly enhance the tensile strength of the wire.


Proven through independent testing programs and 25 years of service use, helical screw ties, such as Thor Helical DriTie, have been identified in the British Research Establishment Digest No.329 as being the only type of remedial tie that can be used in any particular situation irrespective of the substrate, compressive strength or the requirement for the tie to maintain performance in the event of a fire.

Thor Helical 9mm DriTie Specification.

Thor Helical 9.00mm nominal O.D., 316 grade stainless steel, helically roll - formed wire ties having a pitch accuracy variation of no more than 0.5% from any given probate pitch along the axis, and a characteristic cross-sectional area of 14.88mm², impact driven into pre-drilled, pre-determined diameter, pilot holes in dense materials, or directly into low strength soft materials at intervals determined by a qualified structural engineer.



Installation Procedure

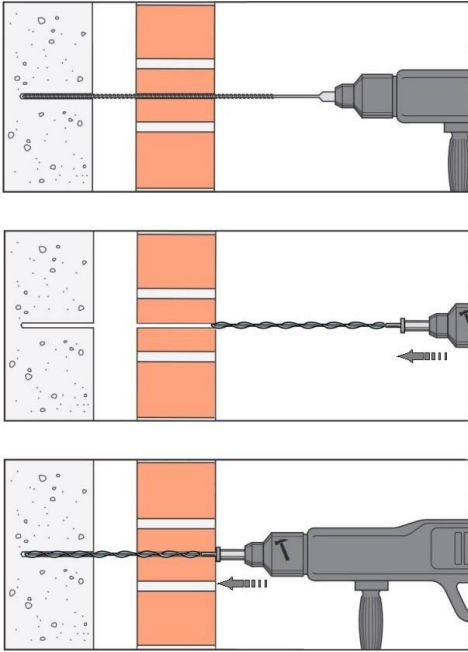

Drill pilot-hole, (6.0mm – 8.0mm), using appropriate masonry drill, to required depth using a drill-stop. To ensure drilling accuracy, allow the drill to **STOP ROTATING** prior to contacting and drilling the far-side leaf. The pilot-hole diameter is critical, too small and the tie may not penetrate, too large and the helical fins will not experience sufficient resistance to induce self-tapping spiral penetration. (Pilot holes are generally not required in A.A.C. or in most softwood timbers).



Insert Thor Helical DriTie into SDS support tool and drive into the pilot hole maintaining concentric alignment. Drive the tie to required depth using a drill stop ensuring that it rotates at a constant rate whilst penetrating.

Continue driving the tie to required depth using a drill stop until the tools' driving spindle recesses the tie beneath the brick face. Make good entry hole with material of similar colour, texture and porosity of wall surface.

This table indicates the indicative Thor Helical DriTie lengths, given known materials and cavity widths. The following assumptions apply:

- Brick has a standard depth of 110mm.
- Tie is recessed 0mm-10mm below brick face.
- Tie is driven into remote leaf to:
 - 60-70mm for brick
 - 45-55mm for concrete
 - 35-45mm for timber

Tie Length (mm)	CAVITY RANGE (mm)					
	Brick to Brick		Brick to Concrete		Brick to Timber	
	Min	Max	Min	Max	Min	Max
180	0	20	15	35	25	45
205	25	45	40	60	50	70
230	50	70	65	85	75	95
255	75	95	90	110	100	120
280	100	120	115	135	125	145
305	125	145	140	160	150	170

Cavity Wall Tie Spacing.

Must be determined by a Consulting Structural Engineer - Subject to minimum tensile proof loads being achieved and in accordance with A.S. 3700 2001, i.e. Maximum allowable spacing 600mm grid.

The Thor Helical hydraulic load test unit is the only one of its type able to measure both tensile loads and corresponding elongation/slippage of the tie. This is an essential accessory for pre-contract testing and for in-process quality control management.



DriTie - INDICATIVE PERFORMANCE GUIDE		
MATERIAL	EMBEDMENT	LOAD
AIRCRETE >3.5N/mm ²	85mm	1.9kN
BRICK >10N/mm ²	75mm	2.6kN
CONCRETE >20N/mm ²	50mm	2.3kN
TIMBER Side-Grain	50mm	2.3kN
TIMBER End-Grain	75mm	2.3kN

THORHELICAL[®] AUSTRALIA
 A.B.N. 77 088 958 016
 P.O. Box 83, Chirnside Park, Vic., 3116.
 2 Mayfair Court, Chirnside Park, Vic., 3116.
 Tel. (03) 9727 5468 Fax. (03) 9726 4976 Mob. 0414 297 899

Available from: